
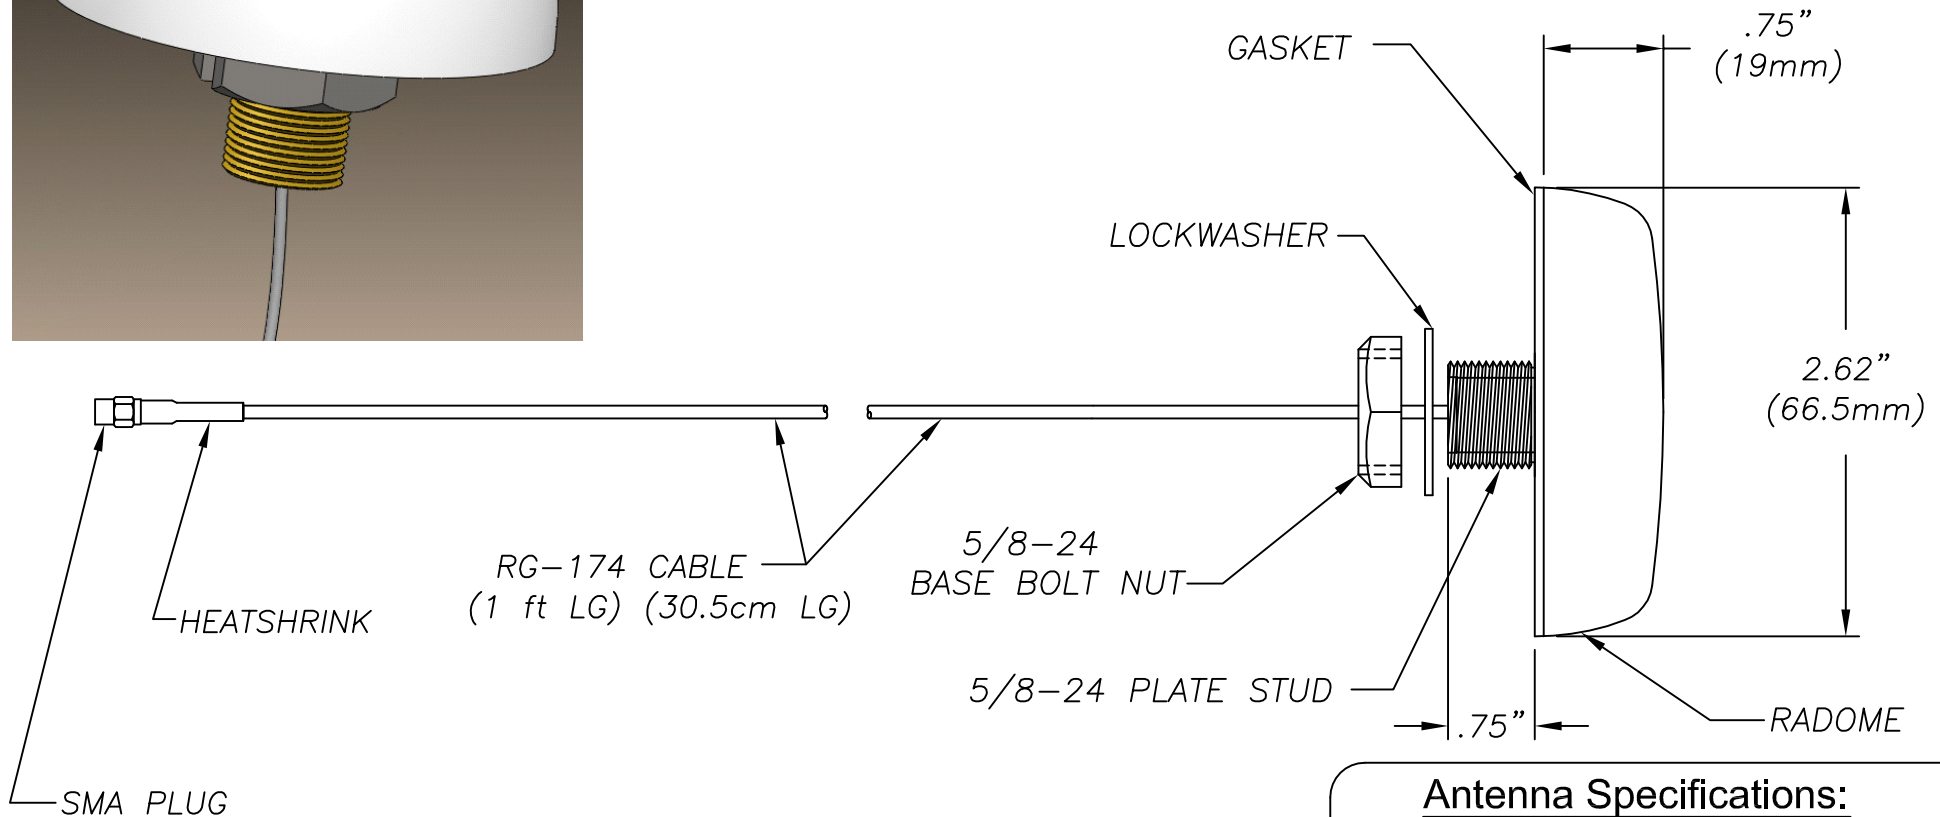


SMG-1575-2C-WHT-12

Surface Mount Antenna with Glonass GPS

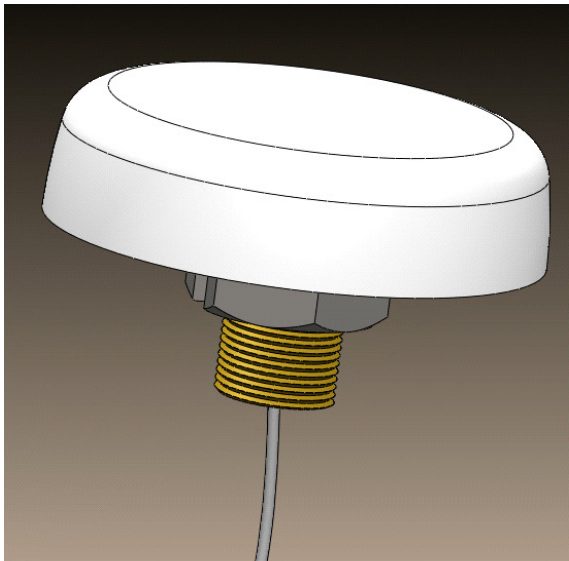

Antenna Specifications:

GLONASS GPS:	1575 MHz/1612 MHz
Voltage	DC 3/5 V
Current	10mA (typ.), 20mA (max.)
VSWR:	2:1 Max. over range
** Connector/Interface:	SMA Plug
Radome Material:	White "ASA" Plastic
Cable	RG-174, 1' (30.5cm) Lg
Impedance:	50 Ohm Nominal
Mounting Stud:	5/8-24 Thd X 3/4" Lg
Shock & Vibration:	EN 61373, IEEE 1478, MIL-810G, TIA-329.2-C

Specifications subject to change without notice

** Connectors may vary per customer order

MobileMark

antenna solutions

US OFFICE & HEADQUARTERS: 1140 W. THORNDALE AVE. ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD, HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM



9/19/24 REV A