


EM-900/2400-0R0R-6

Dual Feed Embedded Flexible Antenna
ISM 863–928, 2.4–2.5 GHz
RG–178 Dual Cable, 6" Lg with U.FL

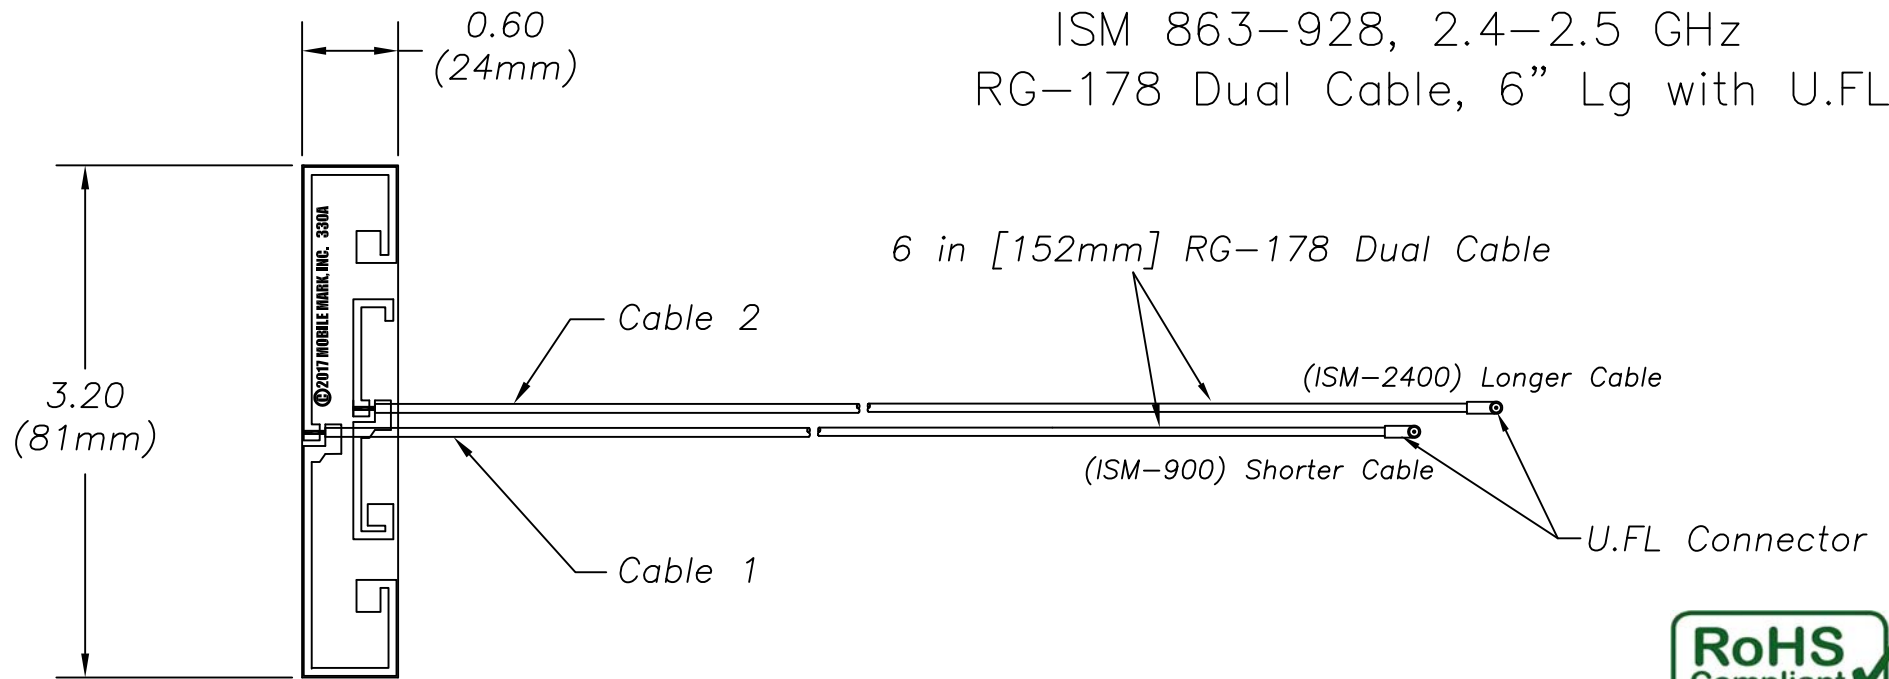

Antenna Specifications:

Frequencies:	_____	Cable 1: 863–928 MHz, 2 dBi
	_____	Cable 2: 2400–2500 MHz, 2 dBi
Isolation:	_____	863–928 MHz, 18 dB
	_____	2400–2500 MHz, 7 dB
Nominal Impedance:	_____	50 OHM
Maximum Power:	_____	5 Watts
Connector:	_____	U.FL
VSWR:	_____	2:1 max over all bands
Mount:	_____	Mounting Tape included
		Typ. install on .060 thk. ABS Material
Dual Cable:	_____	6 in. [152mm] RG-178
Temperature:	_____	–30C to +80C

TC 6/16/17 Rev B

MobileMark
antenna solutions

US OFFICE & HEADQUARTERS: 1140 W. THORNDALE AVE. ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD. HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM