
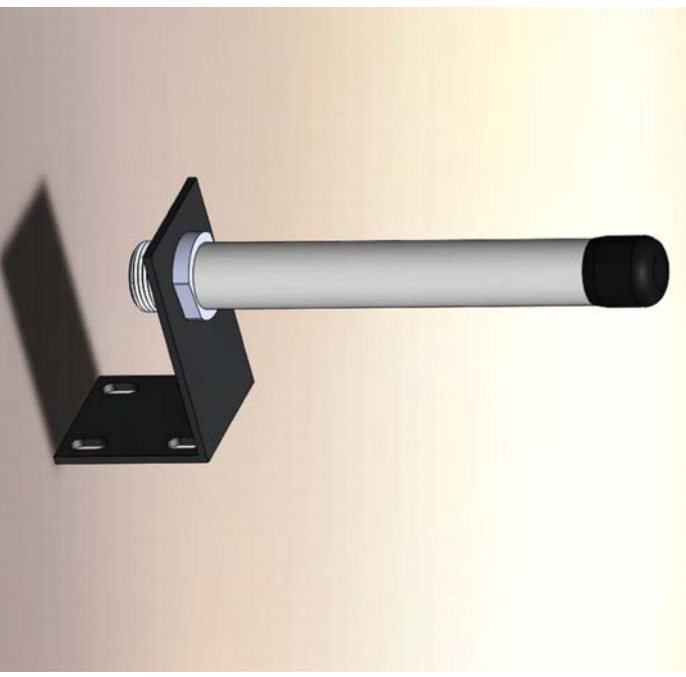


# BSM3500FS3BKT

## Omni Directional Antenna with Mounting Bracket 5dBi, 3550 - 3700 MHz

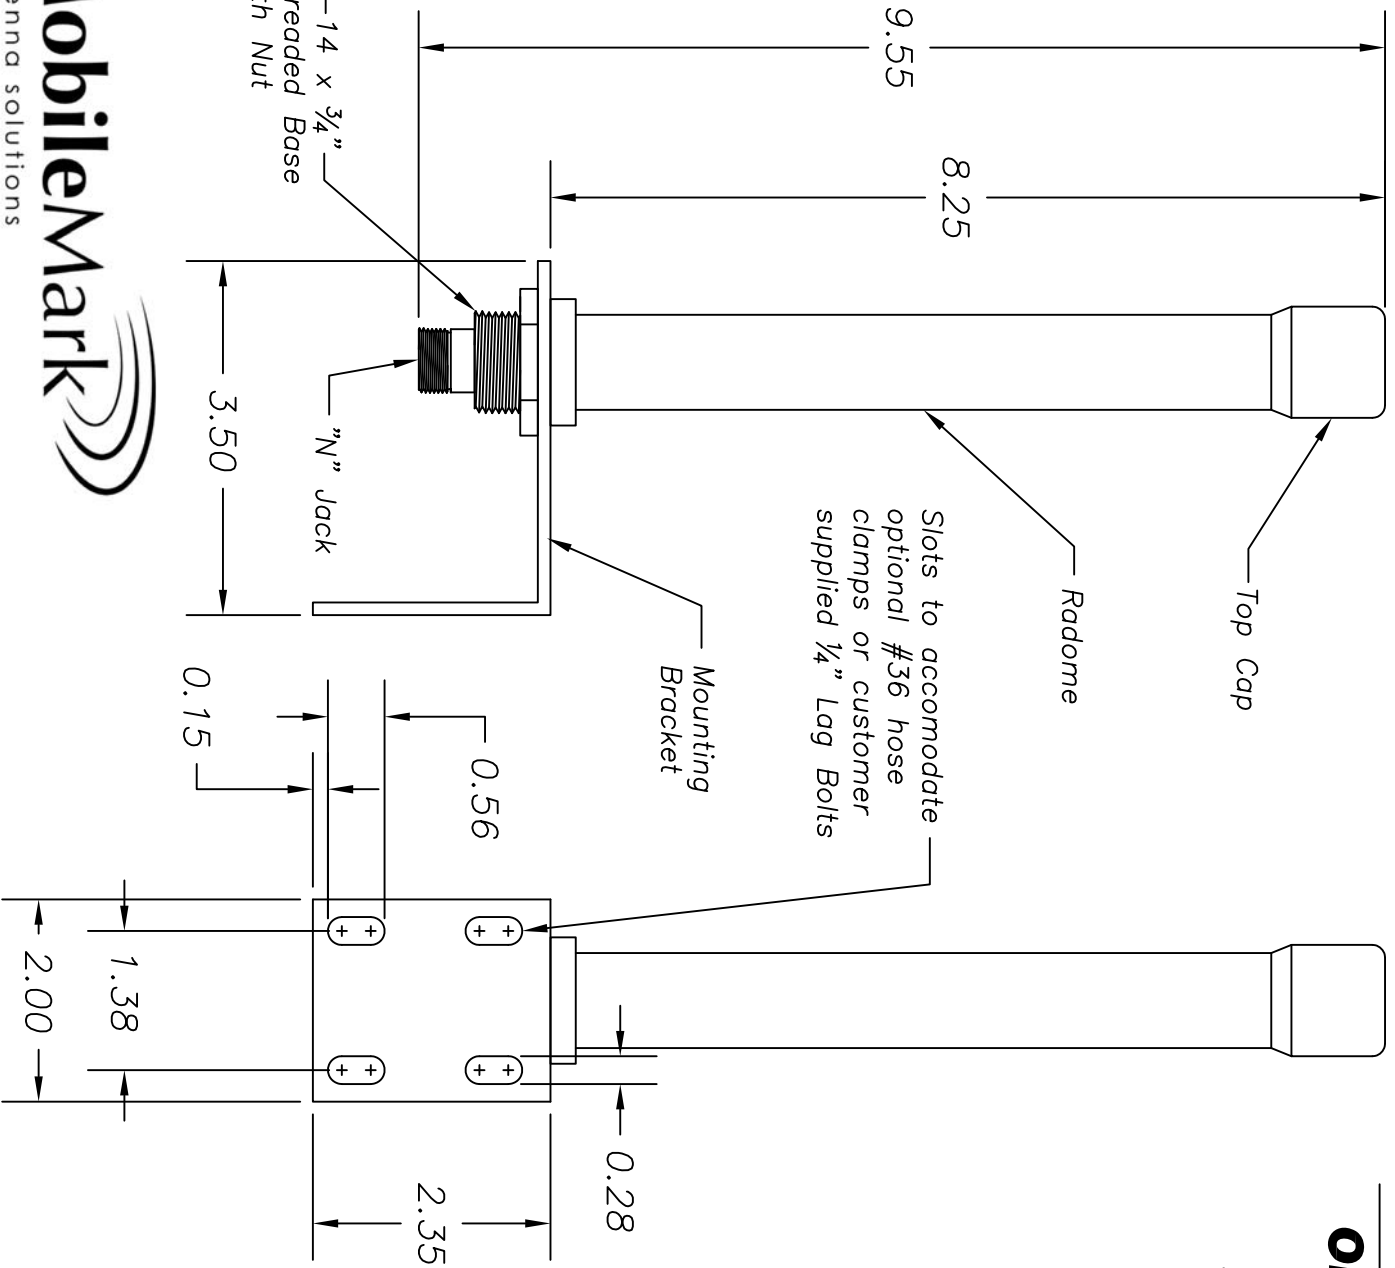

### Antenna Specifications:

Frequency: _____	3550-3700 MHz
Gain: _____	5 dBi Peak
Maximum Power: _____	10 Watts
VSWR: _____	< 2:1
Nominal Impedance: _____	50 OHM Nominal
Vertical B.W.: _____	45 Degrees
Horizontal B.W.: _____	360 Degrees
Connector: _____	"N" Jack
Radome Material: _____	White UV Inhibited Fiberglass
Mounting: _____	1"-14 Threaded Body & Nut for Supplied "L" bracket
Temperature: _____	-40°C to +80°C
Water Ingress: _____	IP x5
Wind Survival: _____	125 MPH (201kph)
Shock and Vibration: _____	Pending

**MobileMark**  
antenna solutions

US OFFICE & HEADQUARTERS: 1140 W. THORNDALE AVE. ITASCA, IL 60143  
TEL: (847) 671-6690 \* FAX (847) 250-5120

UK OFFICE: 8 MRAS BUS PARK, KEYS PARK ROAD, HEDNESFORD WS12 2FS, UK.  
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545  
VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

