

Technical Specification

B46DB2458 BN, WN

Dual Band 2.4GHz / 5.8GHz

LOW PROFILE TAMPERPROOF ANTENNA

Performance: These antennas provide dual band operation in the 2.4GHz and 5.8GHz bands. They are designed for heavy duty service. They have a power handling capacity of 200 watts.


Stylish and Durable: These antennas are manufactured using the finest materials and finishes available. The covers are molded using UV inhibited ABS plastic and are available in black or white finishes.

Reliable: The heavy duty, chrome plated brass base and "N" connector termination provide rugged and reliable performance.

Tamperproof Mounting: These antennas terminate as an "N" type connector making installation as either a ceiling mount or a bulkhead cabinet type mount. These antennas are supplied with a 3" Ground plane.



Vertical Pattern

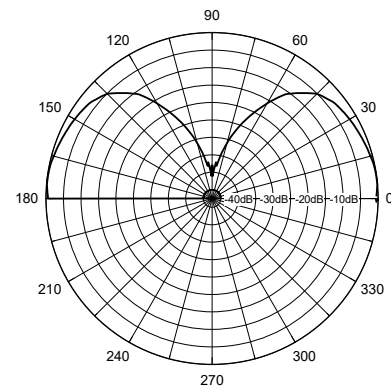

SPECIFICATIONS:

- FREQUENCY RANGE:** 1.5 GHz-2.7GHz 2dBi/Unity Gain
4.5GHz-6.0GHz 5dBi/3dBd Gain
- IMPEDANCE:** 50 ohms
- POWER RATING:** 200 watts
- VSWR:** <2.0:1
- BASE:** Brass, Triple Plated Chrome
- TERMINATION:** "N" Type connector
- HEIGHT:** 2" (4cm)
- DIAMETER:** 1.5" (4cm)
- COLOR:** -B Black or -W White