

LTMG301

PRODUCT OVERVIEW

The 3-cable LTMG301 contains elements for two Cellular antennas one GNSS antenna. This provides MIMO (multiple-input-multiple-output) coverage for LTE Cellular. This antenna is ideal for fleet management systems that combine GNSS with an LTE MIMO modem. GNSS operates on GPS, Galileo, Glonass, QZSS or Beidou.

Specify LTM for units with GPS and LTMG for units with GPS/GLONASS.

Specify MLTMG or MLTM for Mag Mounted units.

Specify CLTM or CLTMG for Ceiling Mounted units.

Visit our eStore to customize an Antenna Online.


Electrical Specifications		
Frequency & Gain	LTE Cables 1 & 2	694 - 960 MHz, 3 dBi 1710 - 2170 MHz, 4 dBi
	GNSS Cable 3	1561, 1575, & 1602 MHz, LNA 26 dB, 5 dBi (RHCP)
VSWR	< 2:1 VSWR over range	
Impedance	50 Ohm Nominal	
Power Rating	10 Watts	
GNSS	Aplifier Gain	26 dB
	Amplifier Bias Voltage	3 to 5 VDC
	Noise Figure	2.0 dB max, 1.5 dB typical
	Current	20 mA max, 10 mA typical

Mechanical Specifications	
Radome Material & Color	ASA UV-Inhibitive Plastic, Available in Black or White
Radome Dimension	5.5" (13.9 cm) in diameter 2.38" (6.0 cm) in height
Standard Connectors	SMA Plugs (Male)
Cables 1 - 2	Separate LL-195, 15 ft (4.5m)
GNSS Cable 3	RG-174, 15 ft (4.5 m)
Operating Temperature	-40° to +80° C
Mounting	7/8" (22.2 mm) Dia. Feed Through 3/4" (19 mm) Long Thread for Up to 1/2" (12.7 mm) Thick Surface
Shock & Vibration	IEEE1478, EN61373, MIL-810G, TIA 329.2-C
Water Ingress	IP 67 When Properly Mounted



MULTI-BAND ANTENNA

L T M G 3 0 1 - 3 C 3 C 2 C - B L K - 1 8 0

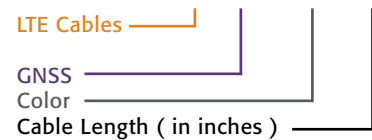

HIGHLIGHTS:

- Multiband Surface Mount: 2x LTE & 1x GNSS
- Covers 694 - 2170 MHz
- High Performance; High Gain
- Made-in-the-USA & UK

RELATED MODELS:

- CLTM301 (Ceiling Mount Model)
- MLTMG301 (Mag Mount Model)
- LTM301 (GPS Model)

COMMON APPLICATIONS:

- Vehicle Fleet Management
- Multiband Modems
- Public Transportation



US Headquarters +1.847.671.6690
US/CA Toll Free +1.800.648.2800
European Facility +44.1543.459555

www.MobileMark.com