Antenna Specifications:

Frequency:	1500–2700 MHz
VSWR:	1500–2400MHz < 2:1
	2400–2700MHz < 2.5:1
Gain:	3 dBi Peak
Radome Material:	Black U.V Stable Polyamide
Impedance:	50 Ohm Nominal
Maximum Input Power:	10 Watts
IP Rating	IP67
Connector:	SMA Plug
Operational Temperature:	−40° to +85°C
Mounting:	Direct SMA Plug
Weight:	1.25 oz (35g)

RP | 8/24/16 | B

MobileMark
antenna solutions

US OFFICE & HEADQUARTERS: 1140 W THORNDALE AVE, ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD. HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

PSGN-2000S

1500-2700MHz
3dBi Flexible portable antenna

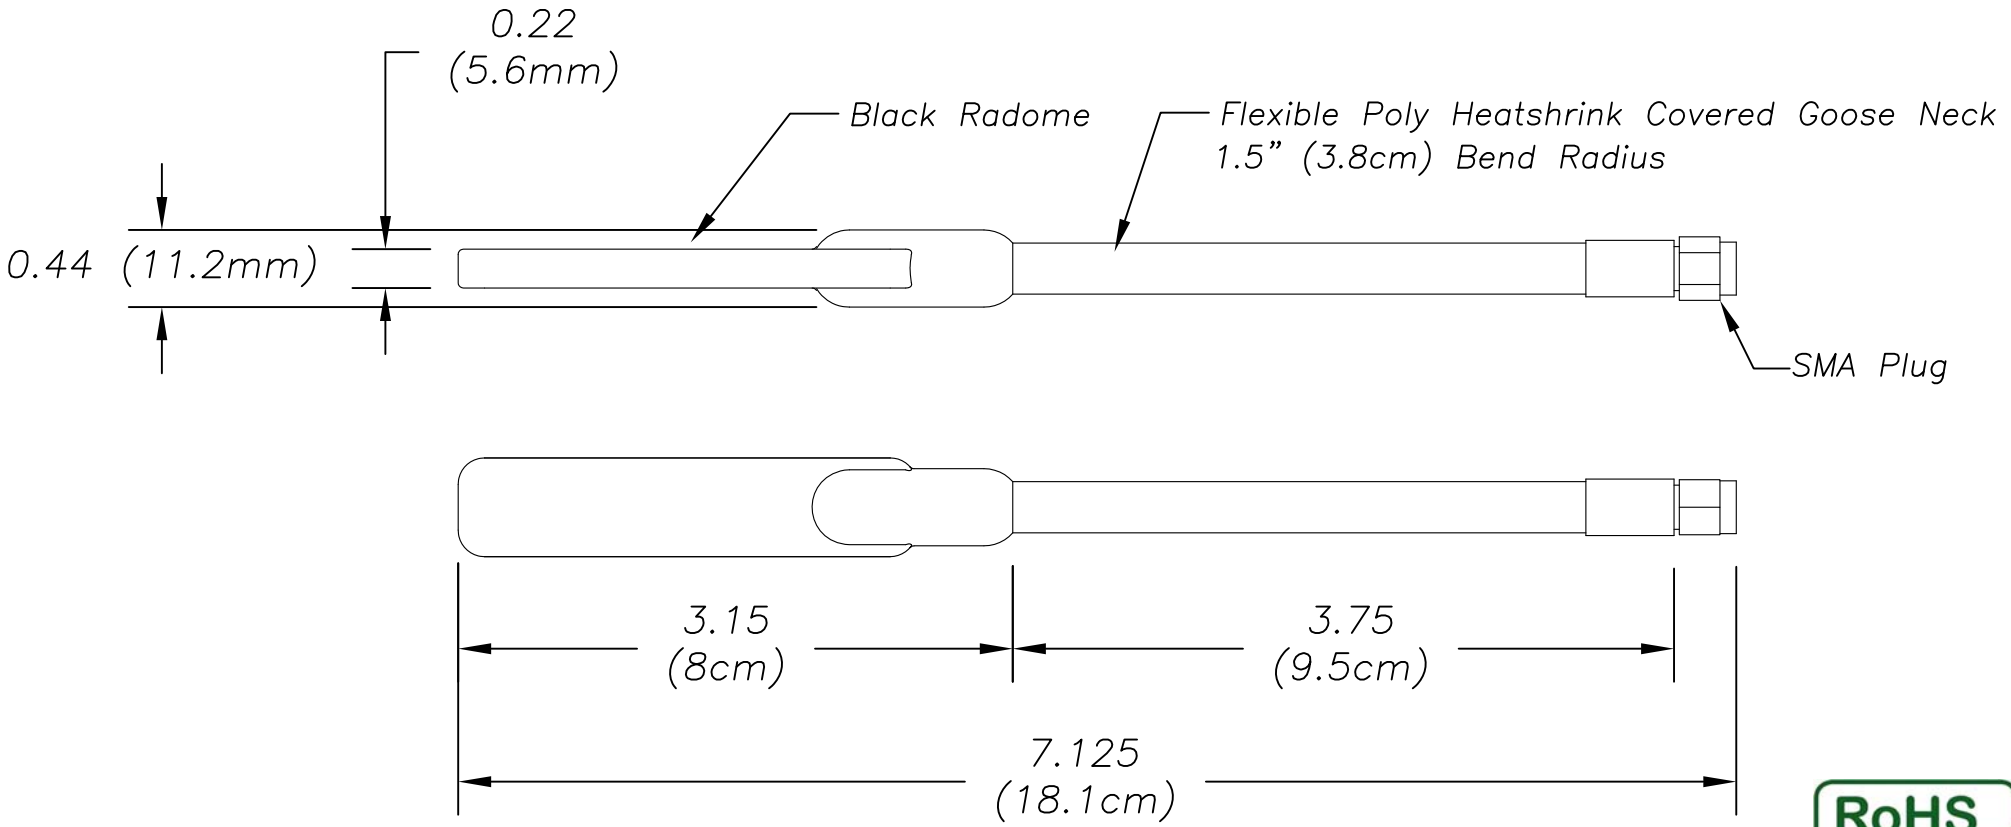

RoHS Compliant